

# Decoding motor intent from simulated multiple longitudinal intrafascicular electrode recordings

Mohamed N. Abdelghani, James J. Abbas, Kenneth W. Horch and Ranu Jung

Signals recorded from peripheral nerves could provide an effective and reliable means of controlling powered prostheses. Longitudinal intrafascicular electrodes (LIFE) have been used to record extracellular motor activity from peripheral nerves for up to several weeks and to use this recorded activity to control a single degree-of-freedom (DOF) prosthetic arm [1]. However, simultaneous control of multiple DOFs of the prosthesis, which is important for many daily tasks, presents additional challenges. Recently we developed a platform to simulate recording of extracellular motor activity from multiple LIFE electrodes [2]. We have also designed and tested an online decoding algorithm that utilizes these simulated recordings. Figure 1A&B shows the schematic of the decoder structure. The decoder is composed of multiple single channel decoders (SCDs) and a demixer. The SCD decodes motor intent from a LIFE recording. It is composed of a bandpass filter to attenuate noise and sharpen spikes, a clipping function to identify spikes and a half-Gaussian smoothing kernel to get a smoothed real-time estimate of motor intent. The demixer identifies the motor intent signals as corresponding to a particular motion class, such as wrist flexion, supination etc. The demixer requires a learning stage, where recordings from LIFE are correlated to motion classes. A simple batched LMS algorithm is used to train the parameters of the demixer. Figure 1C, displays the results of a single channel decoding of a sinusoidal motor intent. Figure 1D shows results of demixing two overlapped motor intents recorded by two LIFE: the first electrode records activity from the two motor pools while the second electrode records activity from only one (not shown). During the learning stage, the demixer learns to account for common motor intent and provide good estimates of the two different motor intent signals. The decoder developed here could be readily implemented in a real-time, portable, low-power configuration to translate multiple LIFE recordings to motor intent signals that enable multi-DOF control of a powered prosthesis.

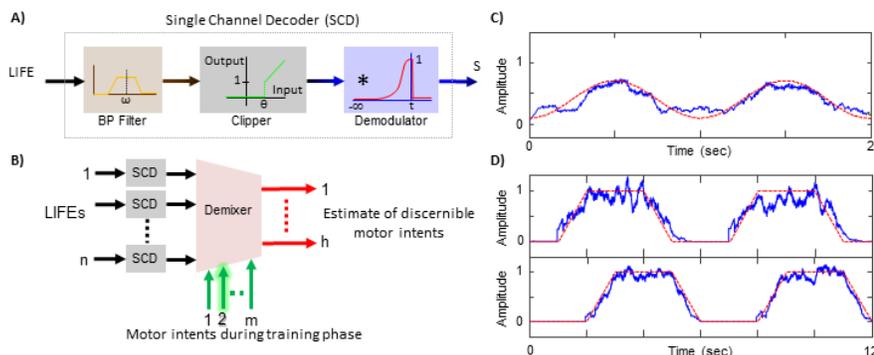


Figure 1: (A) LIFE single channel decoder (SCD): signals are filtered and clipped to remove background noise and normalize and smoothed to obtain the modulating signal S (i.e. motor intent). (B) Multiple single channel decoders followed by a demixer. (C) Actual motor intent (Red) and decoded motor intent (Blue) for an input signal with a single motor intent. (D) Demixing of two overlapped motor intents; (Red) actual motor intents, (Blue) estimated motor intent signals after demixing.

## REFERENCES

- [1] G.S. Dhillon, S. M. Lawrence, D. T. Hutchinson DT and K. W. Horch KW, "Residual function in peripheral nerve stumps of amputees: implications for neural control of artificial limbs," J Hand Surg Am, vol. 4, pp. 605-615, 2004.
- [2] M. N. Abdelghani, J. J. Abbas, K. W. Horch and R. Jung, "A computational model to simulate neural recordings from longitudinal intrafascicular electrodes," Society for Neuroscience Conference, 584.20/SS19, Nov 2012.

This work was supported by Grant/Contract N66001-12-C-4195 to R. Jung from DARPA (MTO) under the auspices of Dr. Jack Judy.

M. N. Abdelghani is with the Department of Biomedical Engineering, Florida International University, Miami, Florida, 33174, USA (phone: 305-348-4782; fax: 305-348-6954; e-mail: mnabdelghani@gmail.com).

J. J. Abbas is with the School of Biological and Health Systems Engineering, Arizona State University, Tempe, Arizona, 85287, USA (email: jimmy.abbas@gmail.com).

K. W. Horch (email: khorch@fiu.edu) and R. Jung (e-mail: rjung@fiu.edu) are with the Department of Biomedical Engineering, Florida International University, Miami, Florida, 33174, USA